

GET OUT THERE


WITH CHIEF OUTDOOR MOUNTS



Outdoor AV installs bring new life to open air spaces, but they also bring new challenges. Extreme temperatures, moisture and UV exposure can lead to faded color, brittle plastic and rusting metal. This can potentially lead to rust-damage on the install, as well as the surrounding architecture. To combat these problems, Chief's outdoor wall mounts are designed with multiple levels of protection, giving your install a leg up on the elements and providing you with peace of mind.

FEATURES

- Listed to UL 2442 Part 2 for Outdoor Mounts
- Warrantied for outdoor use
- Galvanized plating prevents against corrosion and leads to longer life of the mount
- Outdoor primer protects against rusting and provides better paint adhesion
- Outdoor-rated paint meets AAMA 2604-05 Standard for 5-year color retention and chalk resistance
- Weld-free designs reduce potential rust points
- Stainless steel hardware prevents corrosion
- UV-resistant plastics fight against sun damage

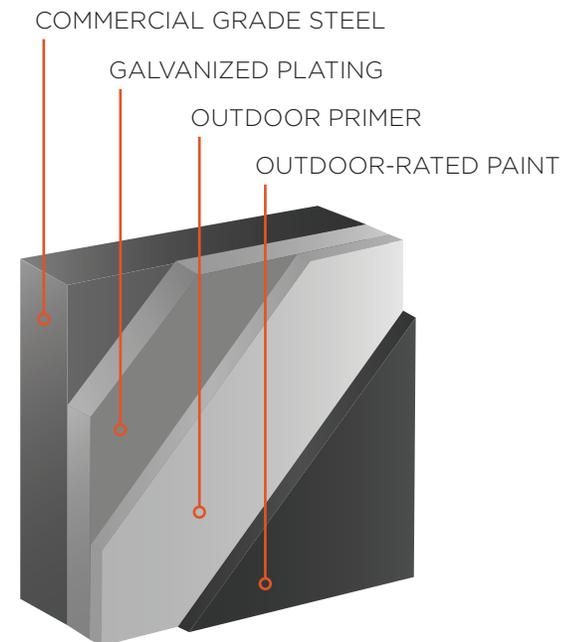

**WELD FREE
DESIGN**



**STAINLESS STEEL
HARDWARE**



**UV-RESISTANT
PLASTICS**



**QUALITY
ASSURANCE**



SPECIFICATIONS

ODMLA25 - Outdoor Swing Arm Mount

Extension: 21.66" (550 mm)


Mounting Patterns: 75 x 75 - 709 x 444 mm

Weight Capacity: 150 lbs (68 kg)

Tilt: +/-15°

Lateral Shift: NA

Dimensions: 18.5 x 29.45 x 4.88" (470 x 748 x 124 mm)

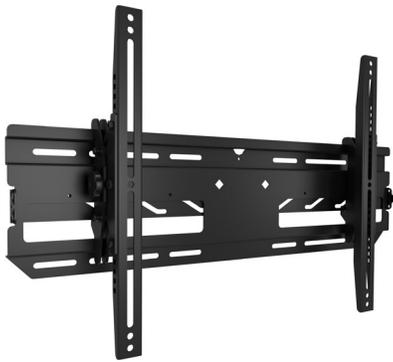

ODMLT - Outdoor Tilt Mount

Mounting Patterns: 127 x 100 - 643 x 430 mm

Weight Capacity: 175 lbs (79.3 kg)

Tilt: +/-15°

Lateral Shift: 2" (51 mm)

Dimensions: 18 x 29 x 3.27" (457 x 737 x 83 mm)

