
INSTALLATION INSTRUCTIONS



Under Desk Keyboard Extension Mechanisms

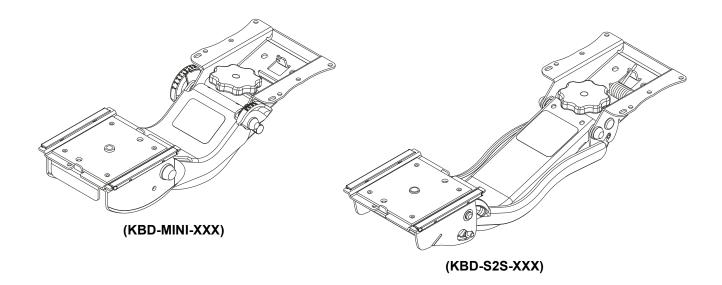

KBD-MINI/S2S-XXX

DISCLAIMER

Milestone AV Technologies and its affiliated corporations and subsidiaries (collectively "Milestone"), intend to make this manual accurate and complete. However, Milestone makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Milestone makes no representation of warranty, expressed or implied, regarding the information contained herein. Milestone assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.

Chief® is a registered trademark of Milestone AV Technologies. All rights reserved.

DEFINITIONS

MOUNTING SYSTEM: A MOUNTING SYSTEM is the primary Chief product to which an accessory and/or component is attached.

ACCESSORY: AN ACCESSORY is the secondary Chief product which is attached to a primary Chief product, and may have a component attached or setting on it.

COMPONENT: A COMPONENT is an audiovisual item designed to be attached or resting on an accessory or mounting system such as a video camera, CPU, screen, display, projector, etc.

WARNING: A WARNING alerts you to the possibility of serious injury or death if you do not follow the instructions.

CAUTION: A CAUTION alerts you to the possibility of damage or destruction of equipment if you do not follow the corresponding instructions.



installer's responsibility to make sure all mounting systems are properly assembled and installed using the instructions provided.

WARNING: Failure to provide adequate structural strength for this mounting systems can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the structure to which this mounting system is attached can support five times the combined weight of all equipment. Reinforce the structure as required before installing the mounting system.

WARNING: Exceeding the weight capacity can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the combined weight of all components attached to mounting system does not exceed 10 lbs (4.5 kg).

WARNING: Use this mounting system only for its intended use as described in these instructions. Do not use attachments not recommended by the manufacturer.

WARNING: Never operate this mounting system if it is damaged. Return the mounting system to a service center for examination and repair.


WARNING: Do not use this mounting system outdoors.




WARNING: RISK OF INJURY TO PERSONS! Do not use this mounting system / accessory to support video equipment such as televisions or computer monitors.

--SAVE THESE INSTRUCTIONS--

DIMENSIONS

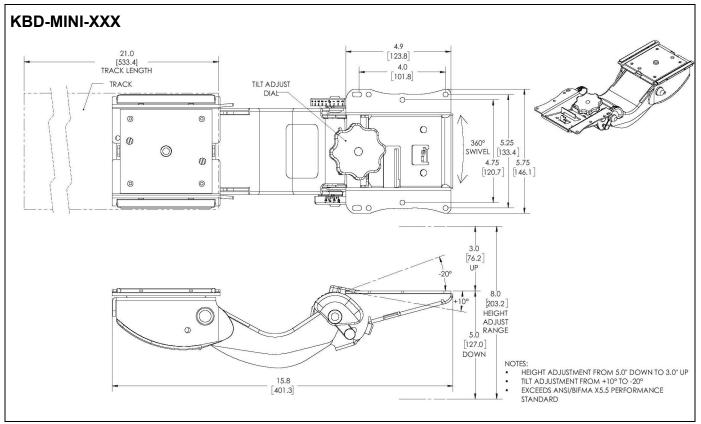


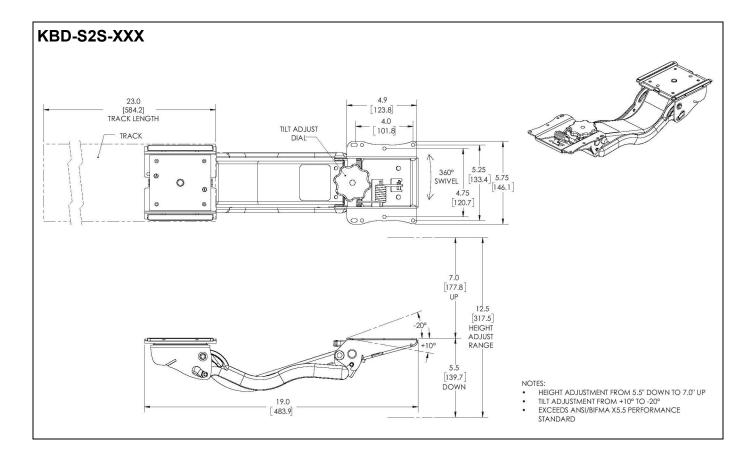


LEGEND

	Tighten Fastener	Pencil Mark
	Apretar elemento de fijación	Marcar con lápiz
	Befestigungsteil festziehen	Stiftmarkierung
(🐳	Apertar fixador	Marcar com lápis
	Serrare il fissaggio	Segno a matita
	Bevestiging vastdraaien	Potloodmerkteken
	Serrez les fixations	Marquage au crayon
	Loosen Fastener	Drill Hole
	Aflojar elemento de fijación	Perforar
	Befestigungsteil lösen	Bohrloch
	Desapertar fixador	Fazer furo
	Allentare il fissaggio	Praticare un foro
	Bevestiging losdraaien	Gat boren
	Desserrez les fixations	Percez un trou
	Phillips Screwdriver	Adjust
	Destornillador Phillips	Ajustar
	Kreuzschlitzschraubendreher	Einstellen
	Chave de fendas Phillips	Ajustar
	Cacciavite a stella	Regolare
	Kruiskopschroevendraaier	Afstellen
	Tournevis à pointe cruciforme	Ajuster
	Open-Ended Wrench	Remove
A O	Llave de boca	Quitar
	Gabelschlüssel	Entfernen
	Chave de bocas	Remover
	Chiave a punte aperte	Rimuovere
	Steeksleutel	Verwijderen
	Steeksleutel Clé à fourche	Verwijderen Retirez
		-
	Clé à fourche	Retirez
	Clé à fourche By Hand	Retirez Optional
E A C	Clé à fourche By Hand A mano	Retirez Optional Opcional
E Contraction of the second se	Clé à fourche By Hand A mano Von Hand	Retirez Optional Opcional Optional
E Contraction of the second se	Clé à fourche By Hand A mano Von Hand Com a mão	Retirez Optional Opcional Optional Optional Opcional Opcional
E Contraction of the second se	Clé à fourche By Hand A mano Von Hand Com a mão A mano	Retirez Optional Opcional Optional Optional Opcional Opcional Opcional Opcional
E Contraction of the second se	Clé à fourche By Hand A mano Von Hand Com a mão A mano Met de hand	Retirez Optional Opcional Optional Opcional Opcional Opcional Opcional Opcional Opzionale Optie
	Clé à fourche By Hand A mano Von Hand Com a mão A mano Met de hand À la main	Retirez Optional Opcional Optional Optional Opcional Opcional Opcional Opcional Opcional Opcional Opcional Opcional Opcional Dpcional Dpcional <
	Clé à fourche By Hand A mano Von Hand Com a mão A mano Met de hand À la main Hex-Head Wrench	Retirez Optional Opcional Opcional Opcional Opcional Opcional Opcional Optie En option Security Wrench
	Clé à fourche By Hand A mano Von Hand Com a mão A mano Met de hand À la main Hex-Head Wrench Llave de cabeza hexagonal	Retirez Provide A seguridad Retirez Provide A seguridad Provide A seguridad Provide A seguridad Provide A seguridad Provide A seguridad Provide A seguridad Provide A segurid
	Clé à fourche By Hand A mano Von Hand Com a mão A mano Met de hand À la main Hex-Head Wrench Llave de cabeza hexagonal Sechskantschlüssel	Retirez Optional Opcional Optional Opcional Opcional Opcional Opcional Opcional Opcional Opcional Opcional Optio En option Security Wrench Llave de seguridad Sicherheitsschlüssel
	Clé à fourche By Hand A mano Von Hand Com a mão A mano Met de hand À la main Hex-Head Wrench Llave de cabeza hexagonal Sechskantschlüssel Chave de cabeça sextavada	Retirez Optional Opcional Optional Opcional Dpcional Opcional Dpcional Opcional Opcional <

TOOLS REQUIRED FOR INSTALLATION

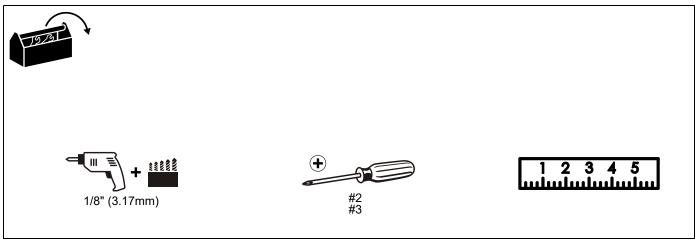

PARTS

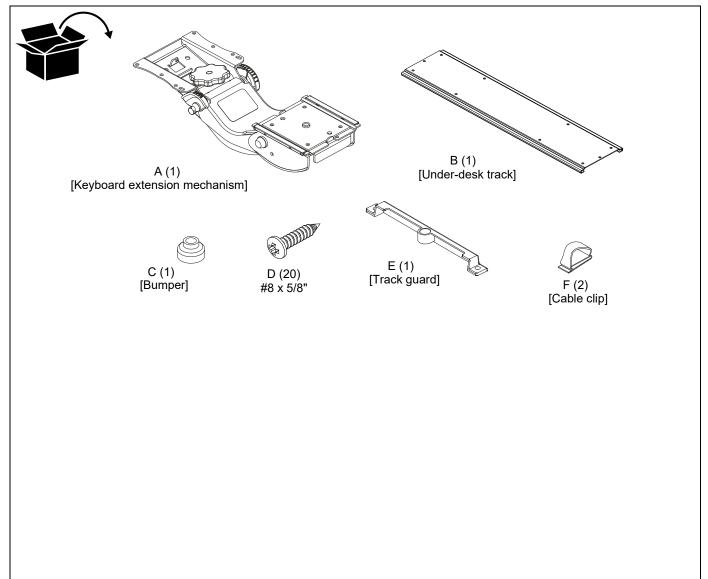

Assembly And Installation

1. Using under-desk track (B) as a template, mark and drill ten 1/8" diameter pilot holes. (See Figure 1)

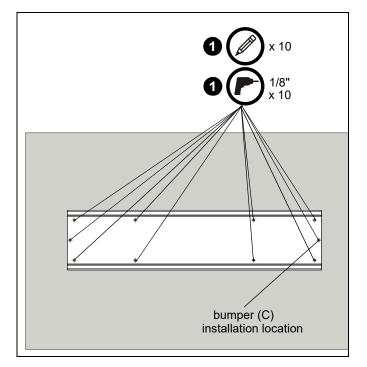


Figure 1

- 2. Use eight #8 x 5/8" wood screws (D) to secure under-desk track (B) to desk. (See Figure 2)
- 3. Install bumper (C) with one #8 x 5/8" wood screw (D). (See Figure 2)

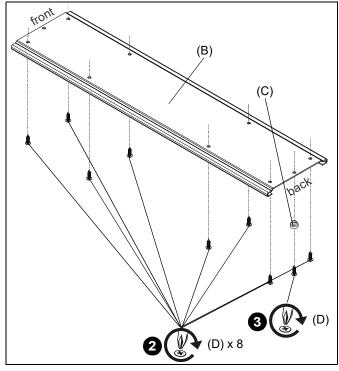


Figure 2

4. Slide keyboard mechanism (A) into under-desk track (B). (See Figure 3)




Figure 3

- Install keyboard tray (not included) onto keyboard mechanism following installation instructions included with keyboard tray.
- 6. Use three #8 x 5/8" wood screws (D) to secure track guard (E) to under-desk track (B) and desk. (See Figure 4)

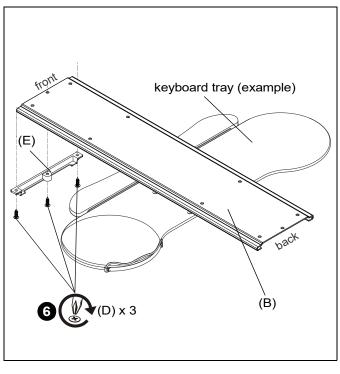


Figure 4


Adjustments

Height

1. Lift mechanism arm up or down until desired height is reached. (See Figure 5)

Tilt

2. Turn tilt knob to adjust keyboard tray tilt. (See Figure 5)

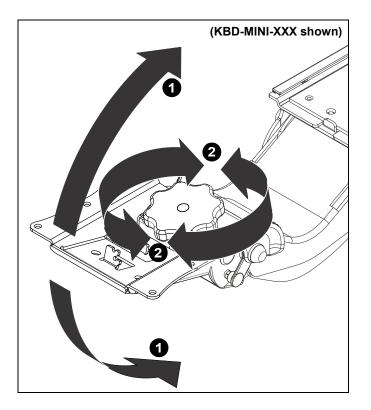



Cable Management

1. Use cable clips (F) under keyboard tray or desk as desired to manage cables.



Chief, a products division of Milestone AV Technologies

8800-003072 Rev00 ©2018 Milestone AV Technologies www.milestone.com 08/18

USA/International

Europe

Asia Pacific

- A 6436 City West Parkway, Eden Prairie, MN 55344
- **P** 800.582.6480 / 952.225.6000
- **F** 877.894.6918 / 952.894.6918
- A Franklinstraat 14, 6003 DK Weert, Netherlands
- **P** +31 (0) 495 580 852
- **F** +31 (0) 495 580 845
- A Office No. 918 on 9/F, Shatin Galleria 18-24 Shan Mei Street Fotan, Shatin, Hong Kong
- **P** 852 2145 4099
- **F** 852 2145 4477

