



16:10    16:9    4:3

 <b>HD Progressive 0.6</b> Viewing Angle: 170° Gain: 0.6	 <b>Matte White</b> Viewing Angle: 120° Gain: 1.0
 <b>HD Progressive 0.9</b> Viewing Angle: 170° Gain: 0.9	 <b>Dual Vision</b> Viewing Angle: 130° Gain: 0.9
 <b>HD Progressive 1.1</b> Viewing Angle: 170° Gain: 1.1	
 <b>HD Progressive 1.3</b> Viewing Angle: 150° Gain: 1.3	

### Tensioned **Descender Large Electrol**

- Ceiling recessed projection screen for medium to large venue applications with a tab-tensioned projection surface for a perfectly flat viewing area. Available in widths from 3.5 to 4.5 metres.
- Easy Serviceability System: once installed, the motor and screen surface remain accessible making adjustments and carrying out maintenance possible.
- Easy to build into existing non-modular ceilings.
- The case and the projection screen surface can be made to exactly the right size and the case is available in any colour for optimal integration into any interior.
- The motor is equipped with electric locks to prevent inadvertent unrolling and features thermal overload cut-off.
- The projection surface is extremely flat, making it suitable for all types of data and video projection.

#### Available dimensions

Minimum width: 350 cm |  
Maximum width: | 450 cm

#### Accessories

- All-in-One Control Box
- More on page 62

#### 2-step installation



- Order the Screen Case separate from the screen surface. Install the screen case during the rough-in stages and the Screen Surface Assembly at a later stage preventing any damage.
- The Screen Surface Assembly includes the bottom panel of the screen, motor and screen surface.
- Order the case first and decide the aspect ratio and screen surface at a later stage ensuring optimal flexibility.



Easy Serviceability System



Perfect integration into the ceiling

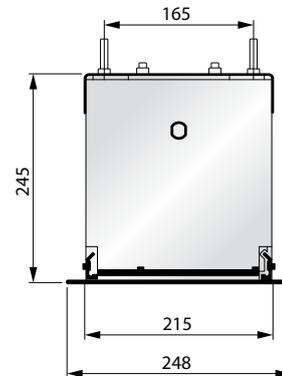

Customise this projection screen to perfectly fit your installation