MEDIA SCREEN

Motorized projection screen for wall or ceiling installations









Product specifications:


- Electrically operated projection screen 230 volt (50Hz) with a usage of no more than 0.61 Ampere (140.3 Watt).
- The motor is mounted inside the roller, 4 wire, 17 rotations per minute, maintenance free, integrated brake and thermal overload cut-out.
- The end positions are pre-set.
- The 4 wire connection is pre-installed and goes through the anodised rounded aluminium casing an can easily be connected to an electric installation.
- Suitable for wall and ceiling mounting with the supplied flexible mounting brackets.
- The round slat bar closes of the bottom of the casing.
- The screen fabrics are flame retardant.
- Seamless fabric up to a hight of 190 cm. The seam in the rear projection screen surface may be slightly visible under projection.
- Standard a 3 position wall switch is supplied.
- The projection screen is tested and monitored by the TÜV/GS programme (EN 60335-1 and EN 60335-2-97) and CE marked and satisfies the strictest quality and safety requirements.

Aspect Ratios:

16:10

4:3

1:1

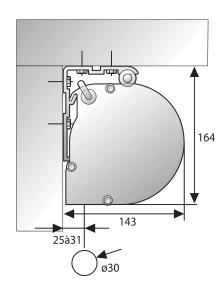


Available dimensions

Minimum width: Maximum width:

400 cm 500 cm

MEDIA SCREEN



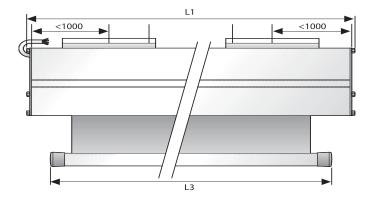

	F	Viewing Area	Dimensions		Border	Net weight
		cm	L1 mm	L3 mm	cm	kg
16:10	250 x 400	250 x 400	4160	4080	0	55
	313 x 500	313 x 500	5160	5080	0	67
4:3	300 x 400	300 x 400	4160	4080	0	55
	375 x 500	375 x 500	5160	5080	0	67
1:1	400 x 400	400 x 400	4160	4080	0	58
	350 x 400	350 x 400	4160	4080	0	57
	300 x 500	300 x 500	5160	5080	0	65
	400 x 500	400 x 500	5160	5080	0	68

Available standard resolution projection surfaces

Matte White

Gain: 1.0 Viewing Angle: 100° Base material: Vinyl

Fire retardancy: B1 (DIN 4102-1; test report 16301)

M1 (NR P 92-512:1986; test report P107396 - DE/1)

Black backing: No Seamless: No

GreenGuard certification: No

MEDIA SCREEN



Certifications

- Products are manufactured in an ISO14001 certified facility
- Projecta is an ISO 9001 certified company
- REACH Registration, Evaluation, Authorisation and Restriction of Chemical substances.
- RoHS Restriction of Hazardous Substances.
- WEEE Waste Electronic and Electrical Equipment Regulations.



Customisation

Give exact the sizes of the projection screen your	need:
Viewing size: Heigth (cm.) x	_ width (cm.)
Surface:	
RAL color case and plastic parts: RAL	
Motor positioned on right side	Screen fabric mounted reversely
Remarks:	

Accessories - control options

For projection screens with a standard motor / delivered as standard with a wall switch

- All-in-One Control Box, which contains:
 - > Relay (dry contact)
 - > RF control, including remote control
 - > IR control, including remote control
 - > Manual switch
 - > 12v DC trigger
- Power Sensing Trigger (need All-in-One Box to function)
- Easy Install plug & play relaybox with potential free contacts
 - > Easy Install plug & play RS232/RS422 control kit
 - > Easy Install plug & play RS232/RS422 with IP control kit
- Keyswitch

Accessories - installation

Ceiling brackets Set extension brackets

Warranty

Projecta provides a limited 5 year warranty on the Elpro Concept range and a limited 2 year warranty on all other products. The warranty on the motor of electrical screens is 5 year. All warranties are in effect beginning the date the product was invoiced by Projecta.