




FlexScreen

- Projection screen with tensioning arm and extension bracket for optimum flexibility with respect to viewing angle and format adjustment.
- The FlexScreen's unique rotate and tilt mechanism means it can be adjusted flexibly.
- The FlexScreen is adjustable to a maximum of 20 degrees for overhead projection, but can also be used for standard video projection.
- Optimum taut projection screen surface in all positions with tensioning arm at rear of the screen.
- Supplied with an extension bracket for wall mounting as standard. A special bracket for ceiling mounting is available as an accessory.

ACCESSORIES:
P 82

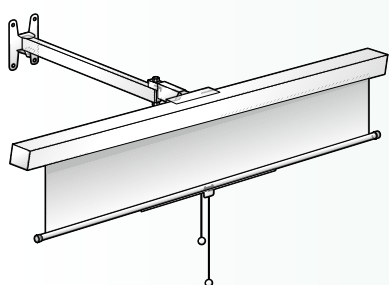

120° 1.0



Professional quality manual projection screen



Tensioning arm at the back



Standard with extension bracket



Triangular slat bar



Aspect Ratio	Overall Dimensions H x W cm	Viewing Area H x W cm	Overall Case Length (RAL 9016) mm	Net Weight kg	Screen Surfaces
					Matte White Product Code
4:3 / 1:1	145 x 145	140 x 140	1520	14	10200058
	160 x 160	151 x 151	1711	16	10200059
	180 x 180	173 x 173	1911	18	10200060