

Dual Motor Low Voltage Control (DMC)




SPECIFICATION DATA

SUGGESTED SPECIFICATIONS: Electrical rating 115 VAC 60 Hz 10A. The dual motor LVC is used to operate the Da-Lite Dual Masking Electrol® Screen or a single motor screen and a projector lift together from one or more locations, remote control, or for integration into a control panel system. Operated by a 3-button momentary dry contact switch. Connections, including 115 volt input, switch input and motor output, to control board provided by screw terminal blocks. Any combination of single or multiple 3-button switches, optional radio frequency remote or infrared remote, or a control panel with momentary dry contacts may control unit. Control board to be mounted in a steel housing measuring 4" H x 6" W x 8" L. Standard knockouts provided on housing for conduit connections. Control to be listed by Underwriter's Laboratories.



WIRING - 120V AC 60HZ

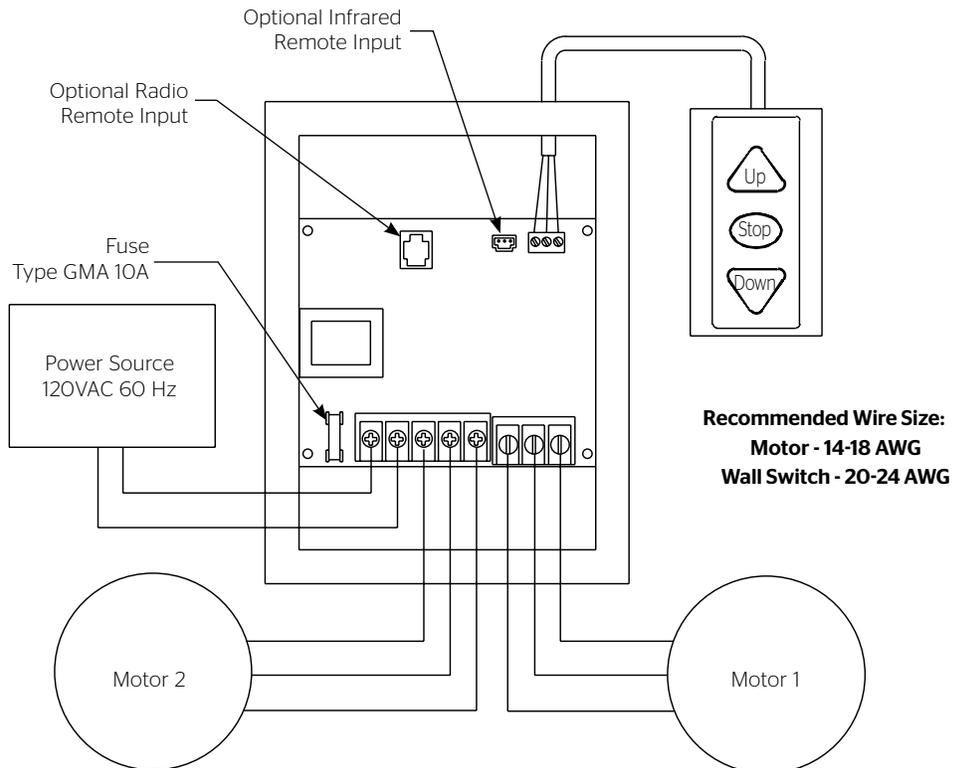

PRODUCT NOTES

- **NOTE:** This control cannot be used with the Horizon Electrol®, Ascender® Electrol®, or Motorized Scenic Roller screens.
- **NOTE:** Do not seal in - allow access.
- Specifications subject to change without notice.

WHEN ORDERING, MARK APPROPRIATE SELECTIONS:

1. Select optional accessories:
 - Radio Frequency Remote Control
 - Radio Frequency Range Extender available
 - Infrared Remote Control
 - Additional 3-button Wall Switch
 - 240V Model Available
 - Key Locking Cover Plate for 120 V Switch or LVC



A Milestone AV Technologies Brand

3100 North Detroit Street
Warsaw, Indiana 46582
P: 574.267.8101 or 800.622.3737
F: 574.267.7804 or 877.325.4832
E: info@da-lite.com
www.da-lite.com

DL-0359 0514

© 2014 Milestone AV Technologies LLC. Printed in U.S.A.

Project Name: _____
Architect: _____
Contractor: _____ Phone: _____
Reseller: _____ Phone: _____