

INSTRUCTIONS FOR
Fast-Fold® Screen
Joining Clamps


DA-LITE®

Installing The Fast-Fold® Screen Joining Clamps

1. Set up one screen complete with legs and picture surface.
2. Screen Joining Clamp is installed from back side of screen. Slide one side of clamp around the side frame of screen so that small lip of joining clamp is under the black binding of the picture surface. Then tighten Knurled Knob.
3. One clamp should be placed near the bottom of the side frame of screen and the second near the top.

NOTE: If the screen is nine feet or more in height, three clamps are recommended. The third clamp should be placed in the center of the side frames.

4. Assemble the second screen frame, using only one leg on the side of the frame away from the side joining the other screen.
5. Slide screen frame in the clamp assembly, making certain that both screens are level. Then tighten Knurled Knobs.

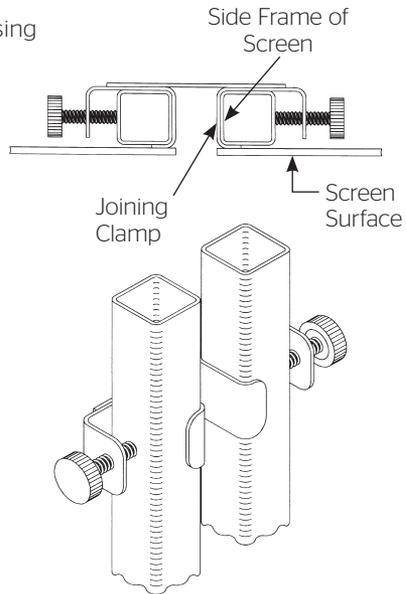

If more than two screens are used, repeat procedure as described above. Only one leg is needed at juncture of the two screens.



A Milestone AV Technologies Brand

3100 North Detroit Street
Warsaw, Indiana 46582
P: 574.267.8101 or 800.622.3737
F: 574.267.7804 or 877.325.4832
E: info@da-lite.com
www.da-lite.com

DL-0328 5.14

© 2014 Milestone AV Technologies LLC. Printed in U.S.A.

47299