SPECIFICATION DATA

Tensioned Cosmopolitan® Series



Table of Contents

Tensioned Cosmopolitan®

Previously Named: Tensioned Cosmopolitan Electrol®

Tensioned Cosmopolitan (Over 12' W)

Previously Named: Tensioned Large Cosmopolitan Electrol

Tensioned Cosmopolitan®

Previously Named: Tensioned Cosmopolitan Electrol®



SUGGESTED SPECIFICATIONS: ______ projection screen(s), _

(H) x _____(W), electrically operated 120 volt (60 Hz) not more than 2.4 amp. To have seamless surfaces with black masking borders standard on flame retardant and mildew resistant fabric mounted on rigid metal roller. Each side of the fabric to have tab guide cable system to maintain even lateral tension and hold surface flat. Custom slat bar with added weight maintains vertical tension on the screen surface. The ends of the slat to be protected by heavy duty plastic caps enclosing a preset adjustable mechanism for screen tensioning. Shall have specially designed motor mounted inside the roller, to be three wire with ground, quick reversal type, oiled for life, with automatic thermal overload cutout, integral gears, capacitor and an electric brake to

prevent coasting. To have preset but adjustable limit switches to automatically stop picture surface in the "up" and "down" position. Case to be powder coated white 21-gauge steel, hexagon in shape with flat back to prevent scraping fabric. Case end caps to be heavy duty, allowing no exposed roller pins. Caps shall form sturdy brackets for wall or ceiling installation. To be complete with three position control switch with cover plate. Screen to be listed by Underwriters' Laboratories.

HDTV (16:9) Format Dimensions

Viewing Area (H x W)		Nominal Diagonal		Overall Case Length		Between Hanger Eyes		Approx. Ship. Wt.	
ln.	Cm	In.	Cm	ln.	Cm	In.	Cm	Lbs.	Kg
45" x 80"	114 x 203	92"	234	98½"	250	97"	246	84	38.1
52" x 92"	132 x 234	106"	269	111"	282	109½"	278	91	41.3
54" x 96"	137 x 244	110"	279	115½"	293	114"	290	93	42.2
58" x 104"	147 x 264	119"	302	124"	315	1221/2"	311	100	45.4
65" x 116"	165 x 295	133"	338	137"	348	135½"	344	110	49.9
78" x 139"	198 x 353	159"	404	162"	411	160½"	408	130	59.0

Wide (16:10) Format Dimensions

Viewing Area (H x W)		Nominal Diagonal		Overall Case Length		Between Hanger Eyes		Approx. Ship. Wt.	
ln.	Cm	In.	Cm	ln.	Cm	In.	Cm	Lbs.	Kg
50" x 80"	127 x 203	94"	239	99"	251	97½"	248	83	37.6
57½" x 92"	146 x 234	109"	277	112"	284	1101/2"	281	89	40.4
60" x 96"	152 x 244	113"	287	116½"	296	115"	292	95	43.1
65" x 104"	165 x 264	123"	312	125"	318	123½"	314	102	46.3
69" x 110"	175 x 279	130"	330	131½"	334	130"	330	105	47.6
72½" x 116"	184 x 295	137"	348	138"	351	136½"	347	116	52.6
87" x 139"	221 x 353	164"	417	159"	404	157½"	400	130	59.0

Video (NTSC 4:3) Format Dimensions

Viewing A	rea (H x W)	Nominal	Diagonal	Overall Ca	se Length	Between H	anger Eyes	Approx.	Ship. Wt.
In.	Cm	In.	Cm	In.	Cm	ln.	Cm	Lbs.	Kg
43" x 57"	109 x 145	72"	183	75"	191	73½"	187	63	28.6
50" x 67"	127 x 170	84"	213	86"	218	84½"	215	72	32.7
60" x 80"	152 x 203	100"	254	100"	254	98½"	250	83	37.6
69" x 92"	175 x 234	120"	305	114"	290	1121/2"	286	96	43.5
87" x 116"	221 x 295	150"	381	141"	358	139½"	354	118	53.5

PRODUCT NOTES

- All viewing surfaces will be seamless.
- All viewing surfaces are standard with black backing except Da-Tex® and Dual Vision.
- All screens standard with 12" black drop at the top.
- Extra drop may alter dimensions. Contact Da-Lite for details.
- Overall case length dimensions +/- 1/4" (6mm).
- Specifications subject to change without notice.
- · Custom formats and sizes available upon request.

WHEN ORDERING, MARK APPROPRIATE SELECTIONS:

- 1. Select size from charts on the other side.
- Select viewing surface (All Da-Lite surfaces are GREENGUARD GOLD Certified):

Da-Mat®

Dual Vision

Da-Tex® (Rear)

3. Options:

Single Motor Low Voltage Control (LVC) - built-in

Wireless Remote Control for LVC

Radio Frequency Remote

Radio Frequency Range Extender available

Infrared Remote

Silent Motor

Silent Motor with Integrated LVC

220 Volt (50 Hz) Motor

Video Projector Interface Control -

built-in (120V motor only)

Black case (white standard)

4. Optional Accessories:

Single Motor Low Voltage Control (LVC) – external

Key Locking Cover Plate for 120V or LVC Switch

Key Operated Switch for 120V only (**NOTE:** Cannot be used with LVC)

Video Projector Interface Control - external

Floating Mounting Bracket (black or white). Recommended for drywall installations.

No. 6 Wall Bracket - 6" extension, non-adjustable (140# maximum per pair) (black or white)


Ceiling Trim Kit - built-in LVC recommended

External SCB-100 - RS-232 Serial Control Board

NET-100 Ethernet-Serial Adapter

PRODUCT VIEWS

SUGGESTED METHOD OF INSTALLATION

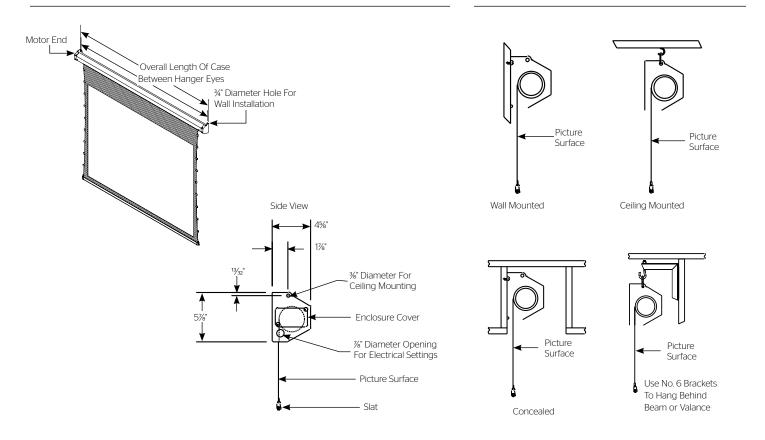

Project Name:	
Architect:	
Contractor:	Phone:
Reseller:	Phone:

Tensioned Cosmopolitan® (Over 12' W)

Previously Named: Tensioned Large Cosmopolitan Electrol®



SUGGESTED SPECIFICATIONS: _______projection screen(s), ______(H) x ______(W), electrically operated 120 volt (60Hz) not more than 2.4 amp. Shall have specially designed motor mounted inside the roller, to be three wire with ground quick reversal type, oiled for life, with automatic thermal overload cut-out, integral gears, capacitor and an electric brake to prevent coasting. To have pre-set but adjustable limit switches to automatically stop picture surface in the "up" and "down" positions. The roller to be of aluminum. Screen fabric to be mildew resistant vinyl with black masking borders standard. Each side of fabric to have a tab quide cable system to

maintain even lateral tension and hold surface flat. Bottom of fabric to be inserted into a custom aluminum slat bar with added weight to provide vertical tension on the screen surface. The ends of the slat to be protected by heavy duty plastic caps enclosing a preset adjustable mechanism for screen tensioning. Case to be a two-piece design made of extruded aluminum with a white, lightly textured powder coat finish. Screen to include a three-position control switch and cover plate. Screen to be listed by Underwriters'

(ÎL) us

HDTV (16:9) Format Dimensions

Viewing Area (H x W)		Nominal Diagonal		Overall Length of Case		Approx. Hanging Wt.		Approx. Shipping Wt.		
	ln.	Cm	In.	Cm	ln.	Cm	Lbs.	Kg	Lbs.	Kg
	92" x 164"	234 x 417	188"	478	186"	472	182	82.6	400	181.4
	108" x 192"	274 x 488	220"	559	215½"	547	211	95.7	472	214.1

Wide (16:10) Format Dimensions

Viewing Area (H x W)		Nominal Diagonal		Overall Length of Case		Approx. Hanging Wt.		Approx. Shipping Wt.	
ln.	Cm	ln.	Cm	ln.	Cm	Lbs.	Kg	Lbs.	Kg
100" x 160"	254 x 406	189"	480	182½"	464	181	82.1	390	176.9
110" x 176"	279 x 447	208"	528	199¾"	507	198	89.8	441	200.0
120" x 192"	305 x 488	226"	574	217"	551	216	98.0	478	216.8

Video (NTSC 4:3) Format Dimensions

Viewing /	Area (H x W)	Nominal	Diagonal	Overall Len	gth of Case	Approx. H	anging Wt.	Approx. SI	nipping Wt.
ln.	Cm	ln.	Cm	ln.	Cm	Lbs.	Kg	Lbs.	Kg
108" x 144"	274 x 366	180"	457	167½"	425	173	78.5	369	167.4
120" x 160"	305 x 406	200"	508	185"	470	187	84.8	398	180.5
126" x 168"	320 x 427	210"	533	194"	493	196	88.9	432	196.0
132" x 176"	335 x 447	220"	559	203"	516	205	93.0	452	205.0
144" x 192"	366 x 488	240"	610	220½"	560	224	101.6	489	221.8

PRODUCT NOTES

- · All viewing surfaces will be seamless.
- All viewing surfaces are standard with black backing except for Da-Tex® and Dual Vision.
- All screens standard with 12" black drop at the top.
- Extra drop may alter case dimensions. Contact Da-Lite for details.
- Overall case length dimensions +/- 1/4" (6mm).
- Detail dimensional drawings, wiring diagrams and installation instructions available upon request.
- Specifications subject to change without notice.
- Custom formats and sizes available upon request, except Parallax Stratos.
- All HD Progressive, Da-Mat, Da-Tex and Dual Vision surfaces are fire retardant.

WHEN ORDERING, MARK APPROPRIATE SELECTIONS

- 1. Select size from charts above.
- 2. Select viewing surface (All Da-Lite surfaces are GREENGUARD GOLD Certified):

Parallax Stratos 1.0 HD Progressive 1.3
HD Progressive 0.6 Da-Mat®
HD Progressive 0.9 Da-Tex® (Rear)
HD Progressive 1.1 Dual Vision

HD Progressive 1.1 Contrast

3. Options:

Single Motor Low Voltage Control Black case (white standard)
System (LVC) - built-in

220 Volt (50 Hz) Motor

4. Optional accessories:

r. Optional accessories.

Single Motor Low Voltage Control Key Operated Switch for 120V only System (LVC) – external (NOTE: Cannot be used with LVC)

Wireless Remote Control for LVC Video Projector Interface

Radio Frequency Remote Control - external


Radio Frequency Range External SCB-100 - RS-232 Serial

Control Board

Infrared Remote NET-100 Ethernet - Serial Adapter

Key Locking Cover Plate for 120V or LVC Switch

Extender

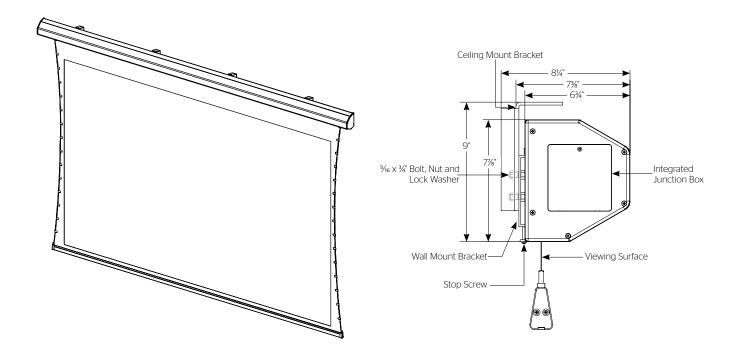

Architect:	Phone:
Contractor:	Phone:
Supervisor:	Phone:
Supplier:	Date:
Revised:	



FOR YOUR IMAGE | legrandav.com

 USA
 P 866.977.3901
 E av.da-lite.support@legrand.com

 CANADA
 P 877.345.4329
 E av.da-lite.support@legrand.com

 EMEA
 P +31 495 580 840
 E av.emea.sales@legrand.com

 APAC
 P +852 2145 4099
 E av.asia.sales@legrand.com



COMMERCIAL BRANDS