



Pearlescent

Tensioned Projection Surface - standard resolution



Standard:
UL 2818 - 2013 Standard for Chemical
Emissions for Building Materials,
Finishes and Furnishings
Certification number:
Greenguard Gold - 5115-420

FRONT PROJECTION

Feature:

Reflectivity

Application:


For applications with uncontrolled ambient light or lower output projectors.

Pearlescent offers a higher amount of reflectivity and is designed for use in applications where moderate viewing angles are required. This surface is a good choice when producing video images with a lower output projector or where there is a high amount of ambient light present. Seamless in any width up to 488 cm in height.

Screen fabric specifications:

Gain	1.5	GreenGuard certification	yes
Viewing Angle	80°	Ambient light resistance	moderate performance
Application	front projection	Coating	front
Base material	vinyl	Coating type	reflectivity
Fire retardancy	B2 DIN4102-1 M2 NFP 92-503	Thickness	~0.59 mm
Black backing:	yes	Weight	~825 g/m ²
Edge Blending properties	not possible	Ability to seam	good
Opacity rating	> 99%	Tear strength	good
Size limitations	488 cm high × any width	Foldable	no
Seamless	up to a height of 488 cm	Cleanable	yes
		Screen type	DIN 19045-4-S (Specular)

Gain

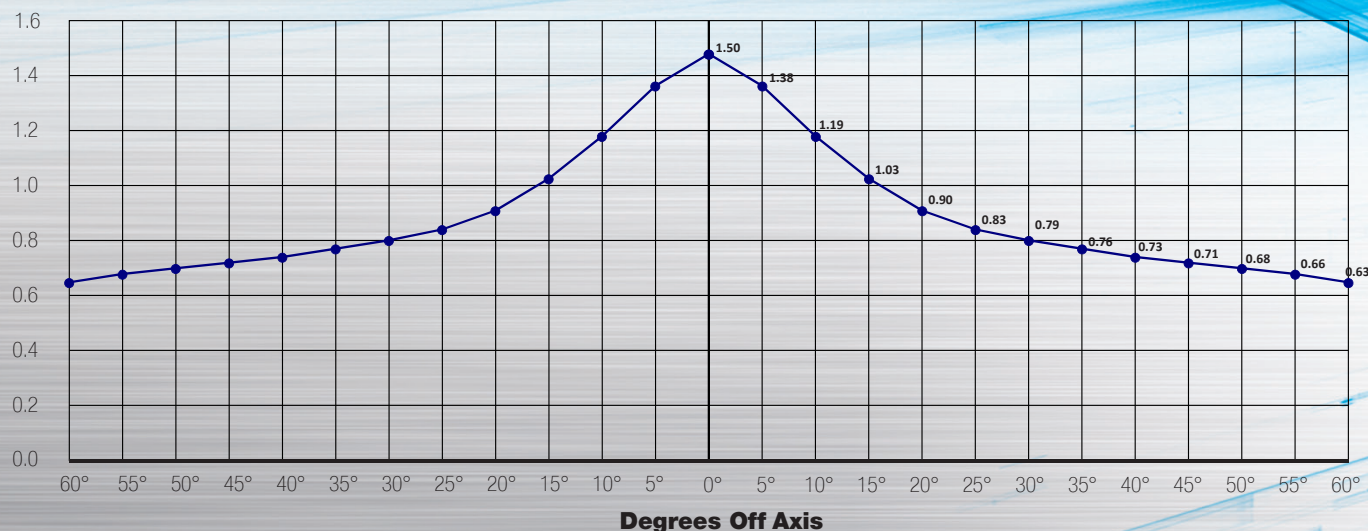

PROJECTA

A BRAND OF MILESTONE AV TECHNOLOGIES BV

REFLECTING YOUR VISION

P: +31 (0) 495 580 840 | F: +31 (0) 495 580 845 | emea.sales@milestone.com | www.projectascreens.com