

**PICK UP
THE PACE
WITH
TEMPO**



TEMPO[®] FLAT PANEL
WALL MOUNT SYSTEM

TEMPO® FLAT PANEL WALL MOUNT SYSTEM

This all-in-one configurable wall mounting system is designed to improve efficiency by streamlining installation workflow. AV professionals can increase productivity and add money to the bottom line with this new system, especially for mass rollouts.

Install on any wall and neatly store AV devices with simple, unparalleled service access. Install 2-6 small devices behind the display on integrated Lever Lock™ storage panels. Tempo Wall Mount System is thoughtfully designed with feedback from installers for faster deployments.

Accelerate AV Installations

- One part number, one box, one order!
- Ship to site pre-loaded with small devices and cabling.

Save Money

- Reduce onsite installation personnel and time.
- Minimize last-minute shipping costs of missing parts.

Feature Flexibility

- Wall plate and sliding interface design facilitates centering display in the right position.
- 10° of adjustable display tilt in 2.5° increments.

Streamlined for Success

- Total installation depth facilitates ADA compliance*
- Up to 1" (25 mm) post-install leveling adjustment.


*When display depth is less than 2" (51 mm)

Integrated Storage

- Ships with two 15"x10" Lever Lock™ plates with space to add more.
- Storage plates can be moved along the mounting rail for best placement of components.

Simplify Service

- Approximately 13" (330 mm) of service access.
- Open wall plate for easy positioning of power and data sources and in-wall storage.

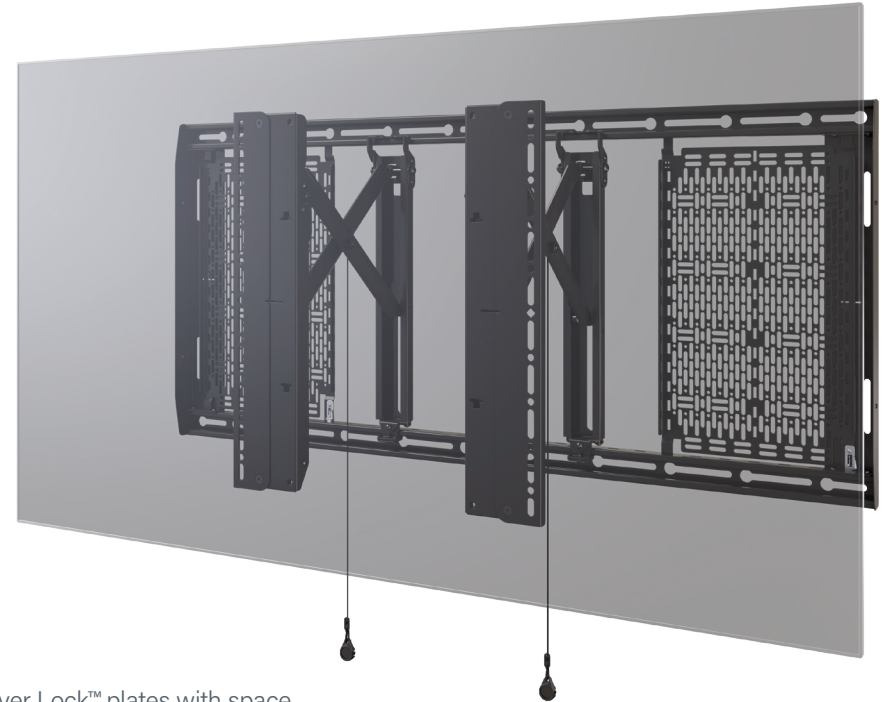

TEMPO[®] SPECIFICATIONS




Part Number	AS3LD	AS3LDP7
Name	Tempo™ Flat Panel Wall Mount System	Tempo™ Flat Panel Wall Mount System with PDU
Power Distribution Unit	None	Includes (1) PD-715SC-NS
Typical Display Size	49"-86"	
Display Weight Capacity	200 lbs (90.7 kg)	
Display Mounting Pattern	Up to 970 x 450 mm	
Dimensions (W x H x D)	42.03" x 19.75" x 1.96" (1068 x 502 x 50 mm)	
Wall Substrates	Steel stud, wood stud, concrete, and block walls	
Post-Install Leveling	1" (25 mm)	
Lateral Shift	Yes	
Tilt	-10°/+0°, 2.5° increments	
Plumb Adjust	0.38" (10 mm)	
Storage Dimensions (W x H)	Includes (2) 10" x 15" (250 x 402 mm) Lever Lock plates	
Storage Weight Capacity	15 lbs (6.8 kg) per Lever Lock plate	
Service Extension	10.65" (271 mm)	
Service Depth	12.61" (320 mm)	
Color	Black	
Certifications	UL, TUV	PD-715SC-NS: ETL

TEMPO® FLAT PANEL WALL MOUNT SYSTEM


PURPOSEFULLY DESIGNED with 42" x 19.75" (1068 x 502mm) footprint - hides behind typical 49" displays and larger

★ **UL LISTED** and **TUV CERTIFIED (pending)**
Safety tested for installation on metal or wood studs, concrete or block wall substrates

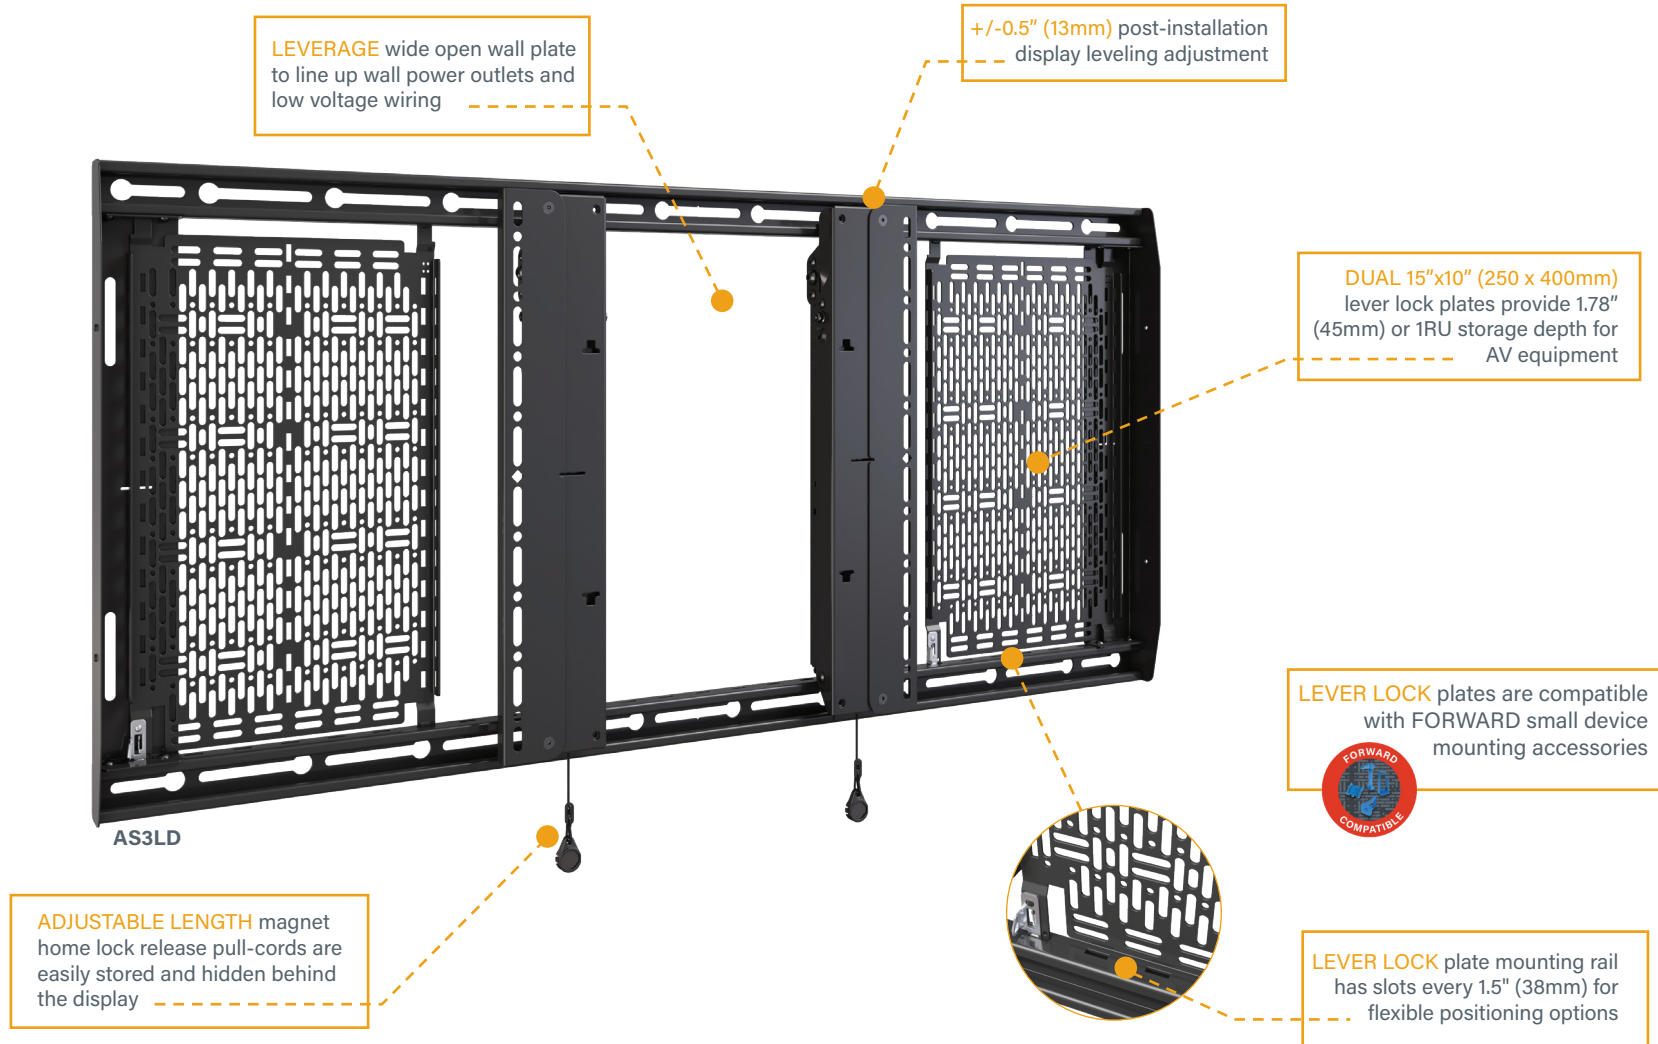

TEMPO® FLAT PANEL WALL MOUNT SYSTEM WITH PDU

* **SLIM** 15A 7-outlet PDU (PD-7155C-N5) ships with AS3LDP7 to power full AV system

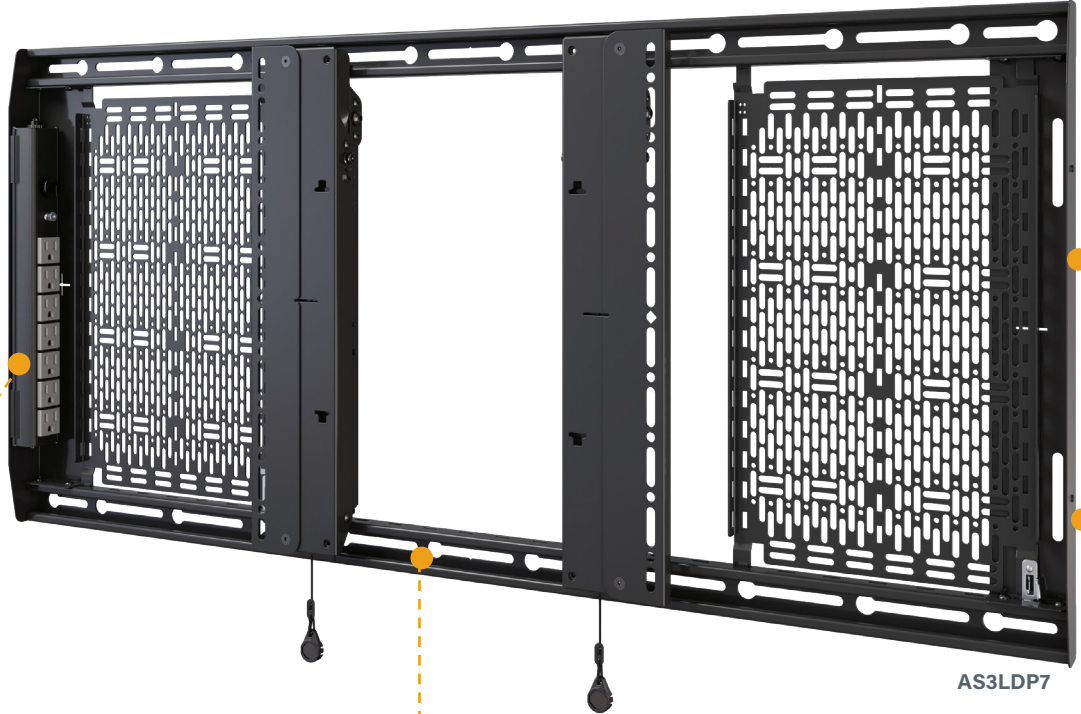


SLIM PROFILE of only 1.96" (50mm) Facilitates ADA compliance with displays less than 2" (51mm)

#10-32 tapped holes for PDU mounting clips

LATERAL SHIFT key-hole slots for continuous mounting positions

TEMPO® PULL-OUT EXTENSION AND TILT

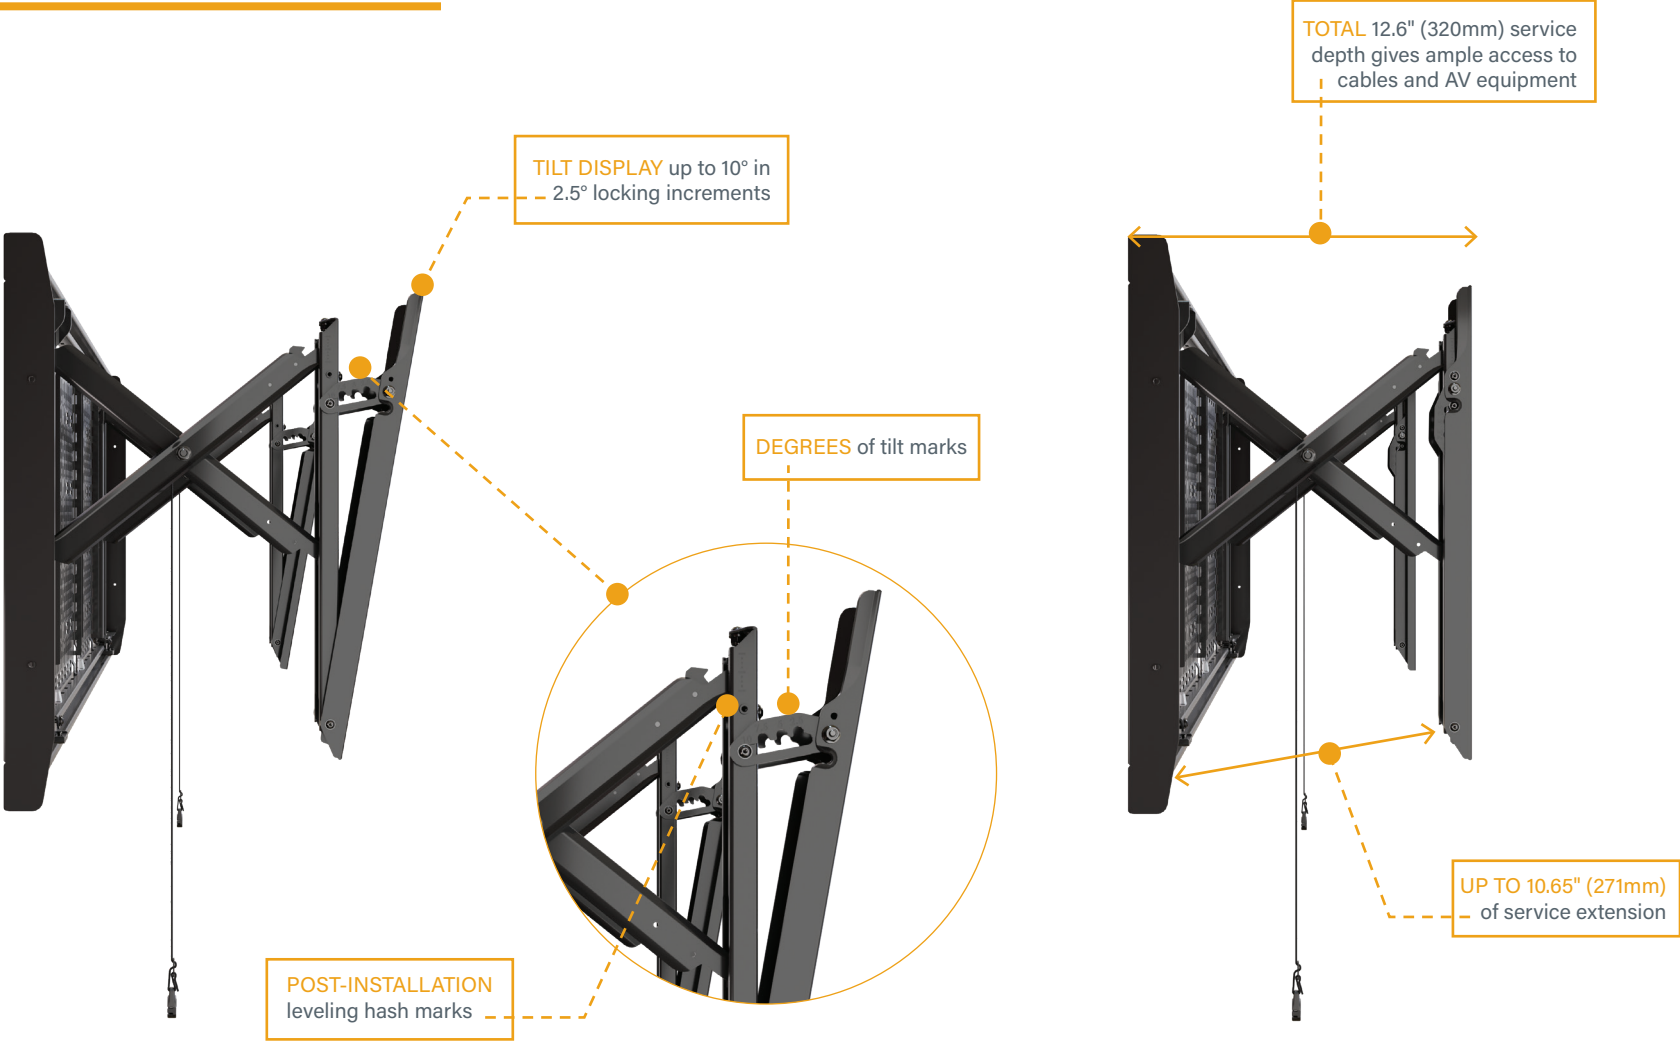


TEMPO® WALL MOUNT ACCESSORIES

A full line of Tempo Wall Mount System Accessories will be available soon including:

- Camera Shelf
- Video Soundbar Mount
- Crestron® Flex Integrator Kit Mount
- 60mm Interface Extender



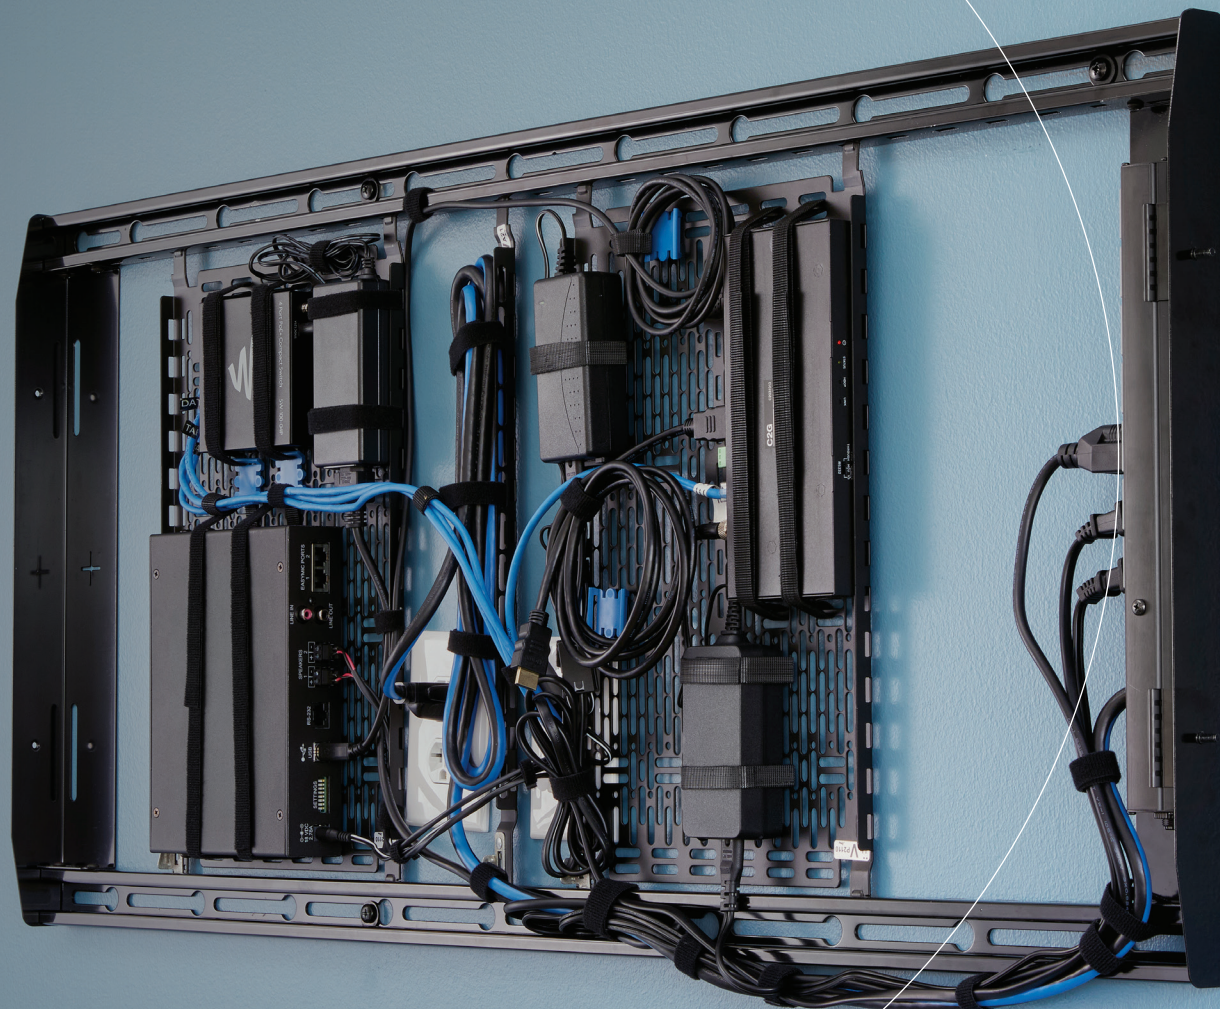

LEGRAND | AV COMMERCIAL BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

INSTALLER INSPIRED | legrandav.com

USA 866.977.3901 av.chief.support@legrand.com CANADA 877.345.4329 av.chief.canada@legrand.com

EMEA +31 495 580 840 av.emea.sales@legrand.com APAC +852 2145 4099 av.asia.sales@legrand.com

©2023 Legrand AV Inc. 230231 Rev A 3/23 Chief is a registered trademark of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.